
Valvola di strozzamento a spillo per montaggio in linea (350 bar)
Needle valve for piping assembly (350 bar)

Tavola 1 / Table 1

DESCRIZIONE DESCRIPTION	CODICE CODE	DN	PN	L	l	H2	H1	m	D	d	n	B	Peso Weight (kg)
AB-I 21-17/DV-G1/8-DN6	97784857	6	350	38	19	60	55	8	24	13	10	16	0,12
AB-I 21-17/DV-G1/4-DN8	97784858	8	350	48	24	71	65	12,5	29	19	14,5	25	0,25
AB-I 21-17/DV-G3/8-DN10	97784859	10	350	58	29	75	68	15	29	19	17	30	0,4
AB-I 21-17/DV-G1/2-DN12	97784860	12	350	68	34	92	82	17,5	38	23	21	35	0,7
AB-I 21-17/DV-G3/4-DN16	97784861	16	350	78	39	106	96	22,5	38	23	26	45	1,2
AB-I 21-17/DV-G1-DN20	97784862	20	350	108	55	149	132	25	55	38	30	50	2,1
AB-I 21-17/DV-G1-1/4-DN25	97784863	25	350	108	55	154	137	30	55	38	35	60	2,8
AB-I 21-17/ DV-G1-1/2-DN30	97784864	30	350	108	55	159	142	35	55	38	40	70	3,5
AB-I 21-17/DV-G2-DN40	97784865	40	350	130	65	165	148	45	55	38	40	90	5,5
AB-I 21-17/DV-G1/8-DN6-V	97784866	6	350	38	19	60	55	8	24	13	10	16	0,12
AB-I 21-17/DV-G1/4-DN8-V	97784867	8	350	48	24	71	65	12,5	29	19	14,5	25	0,25
AB-I 21-17/DV-G3/8-DN10-V	97784868	10	350	58	29	75	68	15	29	19	17	30	0,4
AB-I 21-17/DV-G1/2-DN12-V	97784869	12	350	68	34	92	82	17,5	38	23	21	35	0,7
AB-I 21-17/DV-G3/4-DN16-V	97784870	16	350	78	39	106	96	22,5	38	23	26	45	1,2
AB-I 21-17/DV-G1-DN20-V	97784871	20	350	108	55	149	132	25	55	38	30	50	2,1
AB-I 21-17/DV-G1-1/4-DN25-V	97784872	25	350	108	55	154	137	30	55	38	35	60	2,8
AB-I 21-17/ DV-G1-1/2-DN30-V	97784873	30	350	108	55	159	142	35	55	38	40	70	3,5
AB-I 21-17/DV-G2-DN40-V	97784874	40	350	130	65	165	148	45	55	38	40	90	5,5

MATERIALI:

Corpo: Acciaio
 Tenuta albero: Buna-N (se ...-V = Viton)
 Manopola: Poliammide

MATERIAL:

Body: Steel
 Shaft seal: Buna-N (if ...-V = Viton)
 Turning knob: Polyamid

1		BOSCH REXROTH S.p.A. Cernusco S/N (MI) Via G. Di Vittorio, 1 Tel. 02-923651	Prep.: S. Tocchetto
07-11-02			Contr.: A. Tognoli

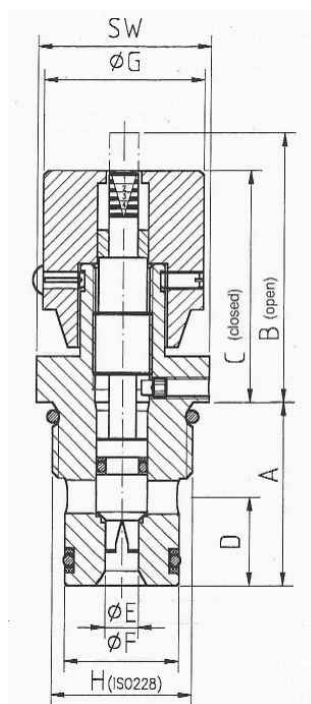

Valvola di strozzamento a spillo per montaggio a frutto (350 bar)
Needle valve for cartridge assembly (350 bar)

Tavola 2 / Table 2

DESCRIZIONE DESCRIPTION	CODICE CODE	DN	PN	A	B	C	D	E	F	G	H	SW	Peso Weight (kg)
AB-I 21-17/DVE-G1/4-DN8	97784875	8	350	27,5	47	41	12	5	14	29	G1/2	27	0,15
AB-I 21-17/DVE-G3/8-DN10	97784876	10	350	30,7	64	54	14,5	6	16	38	G1/2	27	0,25
AB-I 21-17/DVE-G1/2-DN12	97784877	12	350	40	65	55	17,5	8	19	38	G3/4	32	0,5
AB-I 21-17/DVE-G3/4-DN16	97784878	16	350	43,5	65	55	21,1	8	27	38	G1	41	0,7
AB-I 21-17/DVE-G1/4-DN8-V	97784879	8	350	27,5	47	41	12	5	14	29	G1/2	27	0,15
AB-I 21-17/DVE-G3/8-DN10-V	97784880	10	350	30,7	64	54	14,5	6	16	38	G1/2	27	0,25
AB-I 21-17/DVE-G1/2-DN12-V	97784881	12	350	40	65	55	17,5	8	19	38	G3/4	32	0,5
AB-I 21-17/DVE-G3/4-DN16-V	97784882	16	350	43,5	65	55	21,1	8	27	38	G1	41	0,7

MATERIALI: Corpo: Acciaio
 Tenuta albero: Buna-N (se ...-V = Viton)
 Manopola: Poliammide

MATERIAL: Body: Steel
 Shaft seal: Buna-N (if ...-V = Viton)
 Turning knob: Polyamid

Esempio di ordinazione:
Order e.g.:

Strozzatore 1/2" G, in linea: **AB-I 21-17/DV-G1/2-DN12** – cod. 97784860
 Strozzatore 3/4" G, a frutto + guarnizioni Viton: **AB-I 21-17/DVE-G3/4-DN16-V** – cod. 97784882
 Needle valve 1/2" G, piping assembly: **AB-I 21-17/DV-G1/2-DN12** – code 97784860
 Needle valve 3/4" G, cartridge assembly with Viton seals: **AB-I 21-17/DVE-G3/4-DN16-V** – code 97784882

1		BOSCH REXROTH S.p.A. Cernusco S/N (MI) Via G. Di Vittorio, 1 Tel. 02-923651	Prep.: S. Tocchetto
07-11-02			Contr.: A. Tognoli